

The FHT 192 Ionization chamber can be connected to either the FHT 6020 area monitor or the FH 40 G survey meter, for measurements at high energy accelerators or X-ray sources

## FHT 192

Wide Range Ionization Chamber for high precision ambient equivalent dose rate measurements

- 30 keV to 7 MeV energy range
- 100 nSv/h to 1 Sv/h dose rate range
- $\frac{3}{4}$  sphere angular response:
- integrated preamplifier fits to
  - FHT 6020 area monitors
  - FH 40 G survey meter
  - SVG2 military Radiac
- high dose option with remote preamplifier



FHT 40 G survey meter





FHT 6020 area monitor



FHT 192 Ionization Chamber with styrofoam protector

The new FHT 192 is based on the famous PTB-approved medium-pressure chamber FHT 191 N, which is used as a reference standard detector by many organizations. The chamber geometry design offers both excellent angular dependence ( $-45^\circ$  to  $+90^\circ$ ) and energy dependence. The chamber is equipped with a styrofoam protection in order to minimize temperature change induced currents.

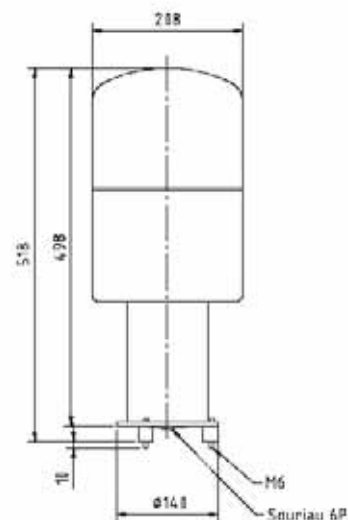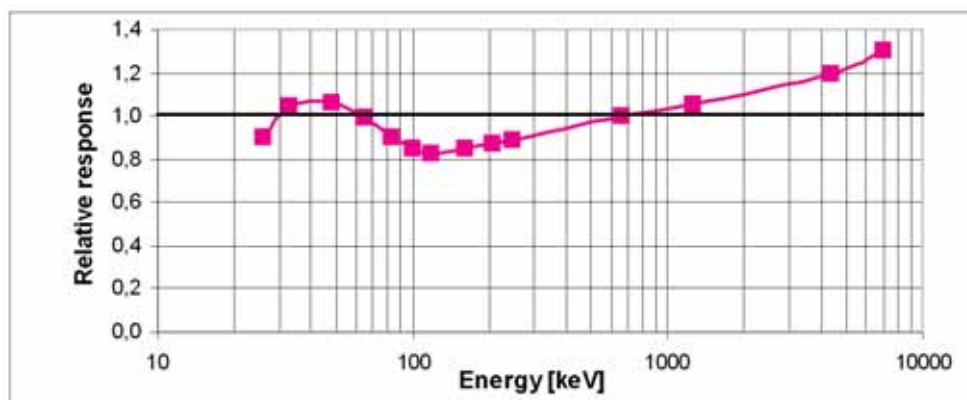

Technical Specification

**FHT 192 Ionization chamber**

Detector type	Pressurized ionization chamber
Measured variable	Ambient equivalent dose rate H*(10)
Measuring range	100 nSvh <sup>-1</sup> - 1 Sv h <sup>-1</sup>
Energy range	30 keV - 7 MeV (± 30%)
Gamma- responsiveness	250 fA/μSvh <sup>-1</sup>
Angular acceptance	-45° < Φ < +90° (270° solid angle)
Overload	Up to 50 Sv/h overload indication
Operating gas (permanently filled)	Noble gas - nitrogen - mixture
Filling pressure	7000 hPa (absolute value)
Volume	4.25 liters

**Dimensions FHT 192 Ionization chamber**

Length	500 mm (19.7") incl. polystyrene cap
Diameter	208 mm (8.2") incl. polystyrene cap
Weight	approx. 3.25 kg (7.1 lb)
Length detector part	270 mm (10.6")

For high dose applications the chamber and the preamplifier can be ordered as separate items:

FHT 190	pressurized ionization chamber	42535/10
FHT 642 I	wide range preamplifier for ionization chambers	42540/83
Connecting cable for FHT 642 I	5m	42540/8311

Standard connecting cable for the FH 40 G, FHT 6020 and SVG-2 are available. Maximal admissible cable length: 50 m (shielded standard cable, AWG26, 0.14 mm<sup>2</sup>)

©2007 Thermo Fisher Scientific Inc. All rights reserved. Kapton is a registered trademark of of E.I. du Pont de Nemours and Company. All other trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries. Results may vary under different operating conditions. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local sales representatives for details. Literature Code LITFHT192 0407

Worldwide  
 Fraunauracher Strasse 96 +49 (0) 9131 909-0  
 D 91056 Erlangen, Germany +49 (0) 9131 909-205 fax

United Kingdom  
 Bath Road, Beenham, +44 (0) 118 971 2121  
 Reading RG7 5PR United Kingdom +44 (0) 118 971 2835 fax

United States  
 27 Forge Parkway +1 (508) 520-2815  
 Franklin, MA 02038 USA +1 (800) 274-4212 toll-free  
 +1 (508) 428-3535 fax

[www.thermo.com/rmp](http://www.thermo.com/rmp)

