

Thermo Scientific Multi-Gas Calibrator, Model 61*i*

Calibrates up to five channels plus zero air



Key Features

- Performs standard calibration
- Easy access drop down panel
- Compact design
- Designed to meet US EPA 40CFR Part 60 requirements

The Multi-Gas Calibrator, Model 61*i* is a critical component of the factory designed iMEGA Continuous Emissions Monitoring System.

The Model 61*i* accepts up to five calibration gases plus zero air and controls the calibration of gas concentrations to ensure accuracy. The front panel display features LEDs that illuminate as indication of which gas is being delivered at any one time.

Designed to ease system calibrations, zeros and spans, intuitive set-ups are controlled through the Model 60*i* analyzer and can be set to perform daily zero/span checks at the probe or at the analyzer only. Available with an optional ozonator, the Model 61*i* can also eliminate the need for having separate cylinders of NO₂ calibration gases.

Built on the renowned iSeries platform design, the Model 61*i* calibrator features durable, plant-proven components, advanced electronics and operator friendly software in a compact design. The intuitive interface, located on the Model 60*i*, allows users to access system controls from a single location. The design also features a drop down panel to allow easy access to components.

The Model 61*i* calibrator and the iMEGA System are designed to meet US EPA 40CFR Part 60 requirements for full extractive measurement.


Product Specifications

To maintain optimal product performance, you need immediate access to experts worldwide, as well as priority status when your air quality equipment needs repair or replacement. We offer comprehensive, flexible support solutions for all phases of the product lifecycle. Through predictable, fixed-cost pricing, our services help protect the return on investment and total cost of ownership of your Thermo Scientific air quality products.

Multi-Gas Calibrator, Model 61i

| | |
|------------------------------------|---|
| Instrument Air Requirements | 80 psi of CDA (Clean Dry Air) |
| Zero Air Flow Controller | 1.3 lpm |
| Span Gas Flow Controller | 1.3 lpm |
| Operating Temperature | 41°F - 104°F (5°C - 40°C) |
| Size and Weight | 16.75" (425mm) W x 8.62" (219mm) H x 7" (178mm) D; 17lbs. (7.7kg) |
| Outputs | Ozone flow status |
| Inputs | DB25 |
| Gas Inputs | 7 |

Schematic

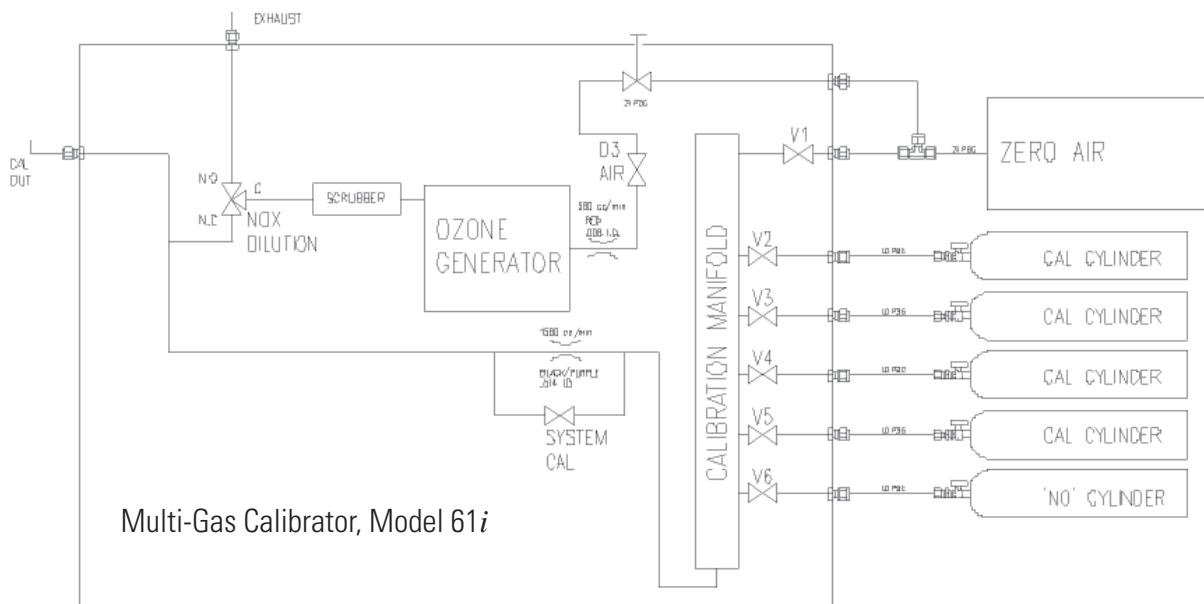

This specification sheet is for informational purposes only and is subject to change without notice. Thermo Fisher Scientific makes no warranties, expressed or implied, in this product summary. © 2009 Thermo Fisher Scientific Inc. All rights reserved Thermo Fisher Scientific Inc.

This product is manufactured in a plant whose quality management system is ISO 9001 certified.

Lit_Model61iAQI_09/09

Air Quality Instruments

27 Forge Parkway
Franklin, MA 02038 USA

(866) 282-0430
(508) 520-0430
(508) 520-1460 fax

www.thermo.com/air

Thermo
SCIENTIFIC